


MINIMUM WALL THICKNESS IN  
ORDER TO CREATE A MINIMUM  
7" GAP BETWEEN FABRIC

DSI-FW119 DEPLOYABLE  
FABRIC FIREWALL

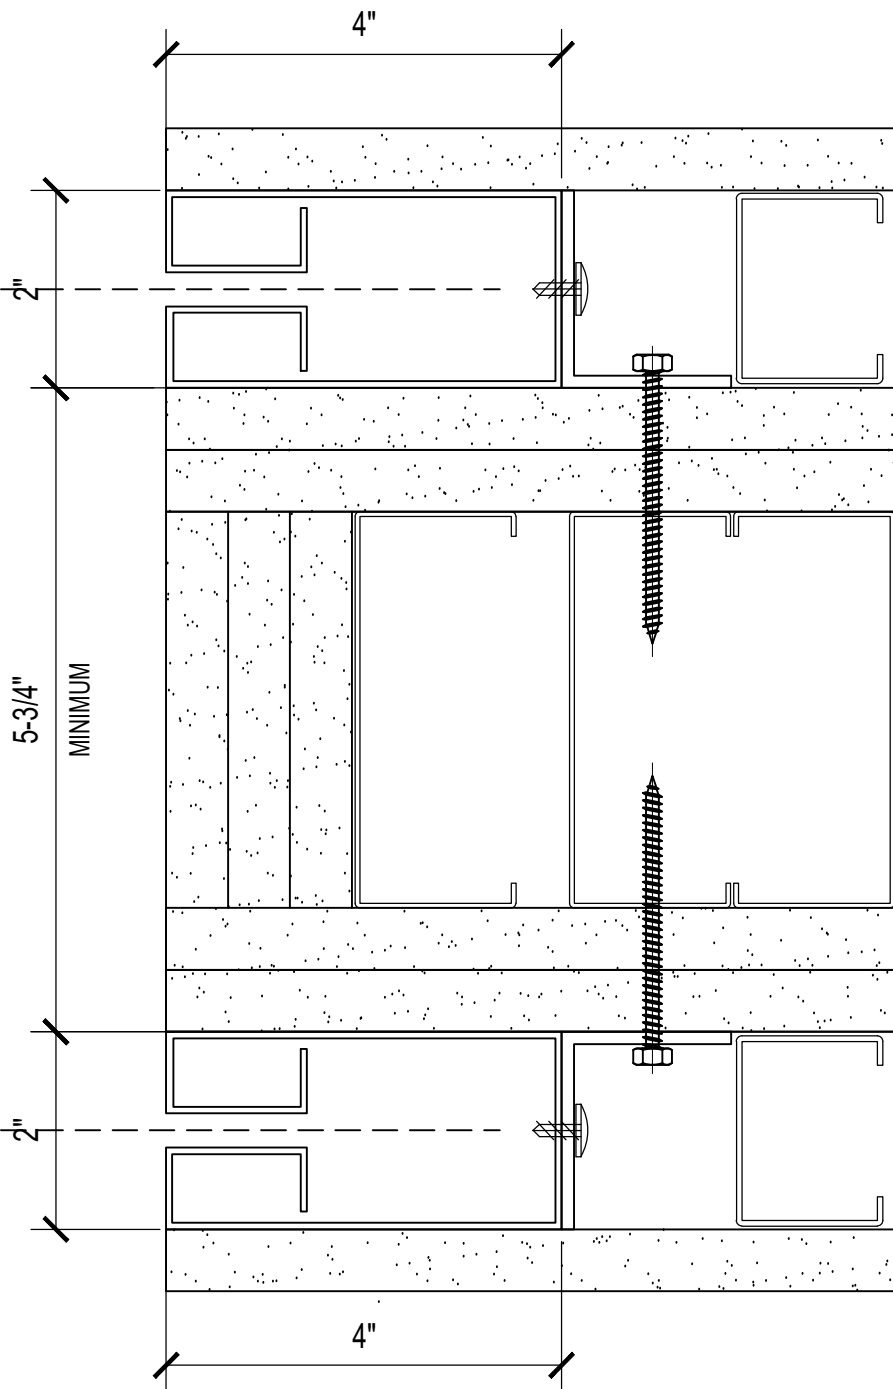

5-3/4"  
MINIMUM

2"

4"

4"



DSI-FW119 DEPLOYABLE FABRIC FIREWALL	SCALE: 6"=1'-0"	JAMB OPTION
JAMB DETAIL OPTION 3, INSET IN DRYWALL FLUSH	DRAWN: 09/20/23	#3