






# DSI 5051-H Dual Closer Kit

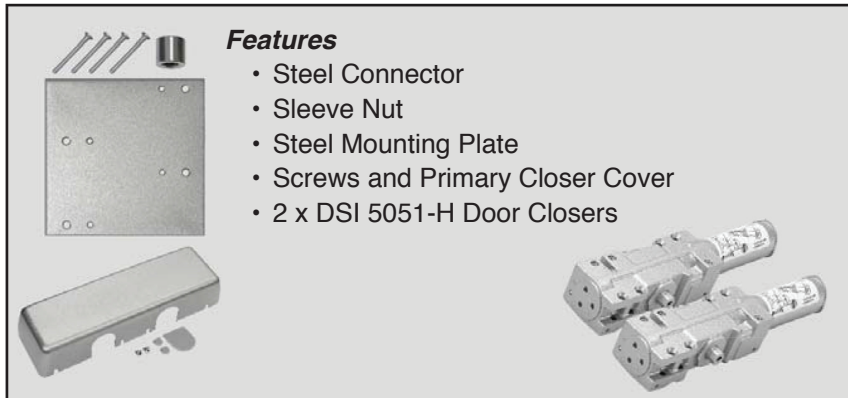


**REGULAR ARM  
(PULL SIDE) MOUNTING**

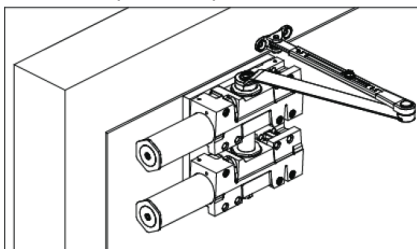

**TOP JAMB  
(PUSH SIDE) MOUNTING**

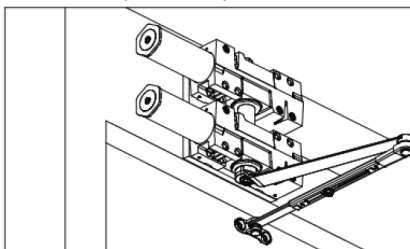


**PARALLEL ARM  
(PUSH SIDE) MOUNTING**

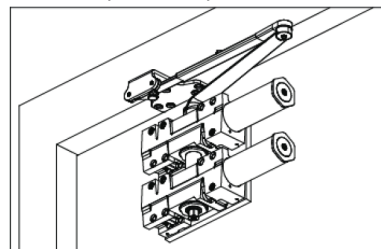

## POWER ADJUSTMENT AND DOOR WIDTH

DOOR MAX WIDTH		ADJUSTING NUT AND TURNS
EXTERIOR	INTERIOR	
-----	5 lb-f	-5 (counter clockwise)
8 lb-f	34" (864)	-2 (counter clockwise)
30" (762)	38" (962)	0
36" (914)	48" (1219)	+5 (clockwise)
42" (1067)	54" (1372)	+10 (clockwise)
48" (1219)	60" (1524)	+15 (clockwise)

## POCKET DOUBLE BARREL APPLICATION

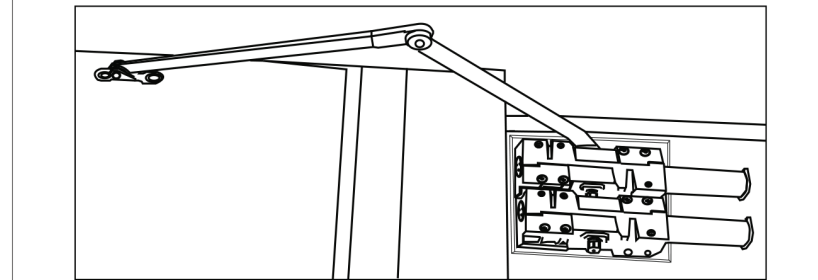

When a single door closer is not strong enough to close a door weighing 260 ~ 520 lbs, the DSI 5051-H Dual Closer Kit allows two DSI 5051-H Series Grade 1 Door Closers to work as one, by connection them together with the high-tensile strength steel connector sleeve nut on a steel mounting plate, doubling the strength and the door weight capacity while maintaining the opening force.

## Features

- Connect two DSI 5051-H Series Door Closers
- For doors 260 ~ 520 lbs weight
- Can be used for regular arm, top jamb, parallel arm, or pocketing mounting
- Easy mounting
- High tensile strength steel connector sleeve nut
- 6  $\frac{11}{16}$ " x 6  $\frac{11}{16}$ " x  $\frac{3}{16}$ " Steel mounting plate
- 4" x  $\frac{1}{4}$ " - 20 x  $\frac{1}{8}$ " mounting screws

## TABLE OF SIZES

Closing power of DSI 5051-H closers may be adjusted 50%

→ Shows recommended range of door width for closer size.

### EXTERIOR (and VESTIBULE) DOOR WIDTH

24"	30"	36"	42"	48"
size 3	size 4	size 5	size 6	
CR441 Series				

Minimum Door Width

### INTERIOR DOOR WIDTH

24"	34"	38"	48"	54"	60"
size 2	size 3	size 4	size 5	size 6	
CR441 Series					

Minimum Door Width

Adjustable Size 1 thru 6