


LINE CARD



SMOKE and FIRE PROTECTION Solutions

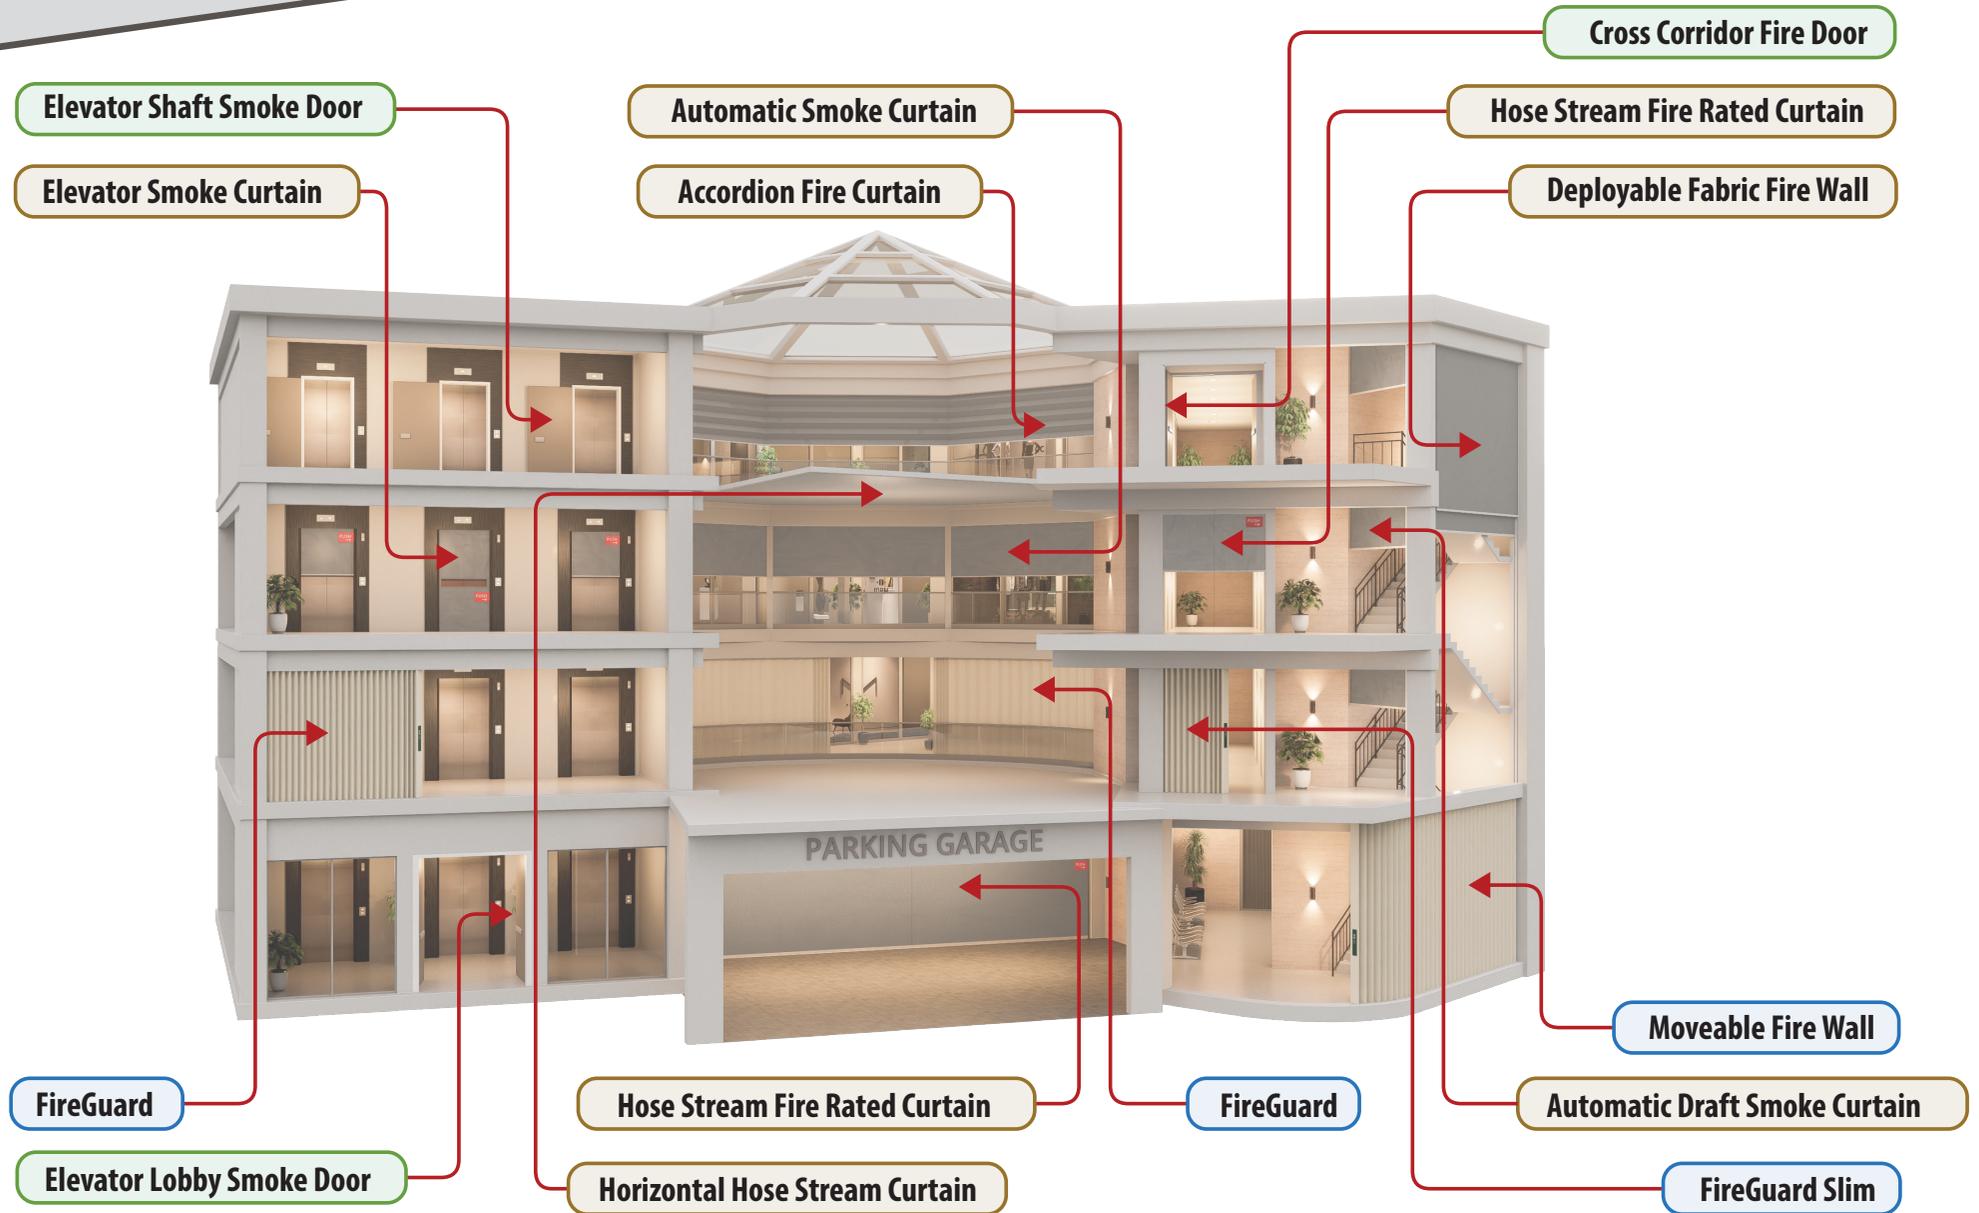

Accordion Fire Doors

FireGuard Slim

- UL 10B/ UL 10C – Up to 90 Minutes
- Openings up to 9'W x 8' H

FireGuard

- UL 1784/ UL10B/ UL 10C – Up to 3-Hours
- Openings up to 200'W x 35' H

Moveable Fire Wall


- ASTM E119/ UL 263 – Up to 2-Hours
- Straight openings up to 40'W x 15' H
- Curved openings up to 30'W x 12' H.

SteelGuard

- UL 10B/ UL 1784 – Up to 3-Hours
- Openings up to 40'W x 15' H
- Security and Fire-Rated Accordion Folding Doors

DuraSound

- 48 STC Rating
- Acoustically Rated Folding Partitions

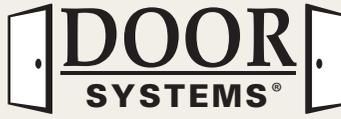

DSI Smoke & Fire Curtains

Elevator Smoke Curtain (DSI-600)

- UL 1784 – Smoke Label
- UL 10D – Fire Protective Curtain

Automatic Smoke Curtain (DSI-C1HR/C3HR)

- UL 1784 – Smoke Label
- UL 10D – Fire Protective Curtain

Accordion Fire Curtain (DSI-A1/A4HR)

- UL 1784 – Smoke Label
- UL 10D – Fire Protective Curtain

Automatic Draft Smoke Curtain (DSI-D1HR)

- UL 1784 – Smoke Label
- UL 10D – Fire Protective Curtain

Hose Stream Fire Rated Curtain (DSI-HS10B)

- UL 1784 – Smoke Label
- UL 10B – Up to 3-Hours

Horizontal Hose Stream Curtain (DSI-HHS10B)

- UL 1784 – Smoke Label
- UL 10B – Up to 2-Hours

Deployable Fabric Fire Wall (DSI-FW119)

- ASTM E119/ UL 263 – Up to 2-Hours



Integrated Fire Doors

Elevator Shaft Smoke Door

- UL 1784 – Smoke Label without artificial bottom seal
- Maximum Opening – 4'3"W x 9'0" H

Elevator Lobby Smoke Door

- UL 1784/ UL10B/ UL 10C – Up to 3-Hours
- Maximum Opening – 8'6"W x 10'0" H

Cross Corridor Fire Door

- UL 1784/ UL10B/ UL 10C – Up to 3-Hours
- Maximum Opening – 8'6"W x 10'0" H

Stairwell Fire Door

- UL 1784/ UL 10B/ UL 10C – Up to 3-Hours
- Standard Single Door
- Maximum Opening – 4'3"W x 9'0" H
- Temperature Rise 250



Connect with us (866) 534-DOOR (3667) | doorsysinc.com | contact@doorsysinc.com