

## Smoke Seals – Perimeter and Meeting Edge


Included with each integrated door assembly, Syntégra provides approved perimeter and leading edge seals to match the opening configuration. Approved for smoke and draft control, these seals also help to control sound and moisture.

### Perimeter Seal



#### Features:

- Compression bulb type provides an excellent seal without impeding door movement
- High temperature silicone material (end use range of -58°F up to 450°F)
- Extended-life design meant for high-traffic commercial applications
- Mildew and fungus resistant
- Peel-n-stick adhesive
- Bronze color standard

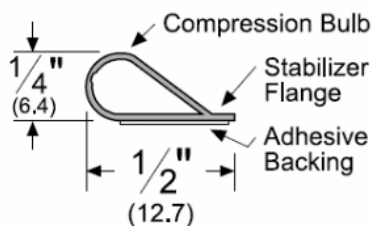


#### Approvals:

- Smoke and draft control – Category “H” up to 3 hours for Hollow Steel Fire Doors
- UL10C listed for use on “S” labeled doors
- ANSI/BHMA Certified

# Smoke Seals – Perimeter and Meeting Edge

## Meeting Edge Seal

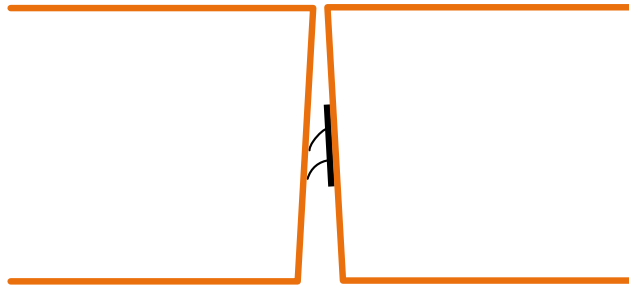

### Features:

- Smoke rated for meeting edge astragal applications
- Maintains low opening and closing forces
- Double Fin design prevents thermal transfer and smoke infiltration
- Sound seal rated
- Peel-n-stick adhesive (adhesive end use range of -58° up to 450°)
- Extended-life silicone material with bronze color standard



### Approvals:

- Smoke and draft control – Category “H” up to 3 hours for Hollow Steel Fire Doors
- UL10C listed for use on “S” labeled doors
- Meets requirements for RoHS directive
- ANSI/BHMA Certified